


1968 EVINRUDE SERVICE MANUAL

STARFLITE

100 HP

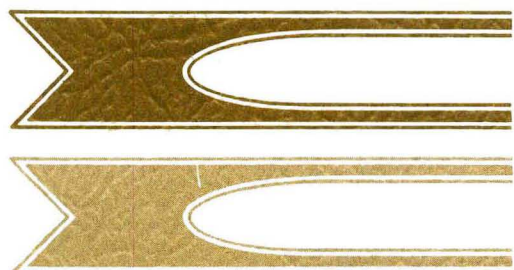

MODELS

100882 100883

SECTION	
INTRODUCTION	1
GENERAL SERVICE INFORMATION	2
FUEL SYSTEM	3
IGNITION SYSTEM	4
POWER HEAD	5
LOWER UNIT	6
ELECTRICAL SYSTEM	7
REMOTE CONTROL	8

EVINRUDE OUTBOARD OIL

We recommend using EVINRUDE OUTBOARD OIL.

EVINRUDE OUTBOARD OIL is designed specifically for Evinrude outboard motor use at a 50 to 1 gasoline to oil ratio for engine break in and after break in, new and older models. This improved lubrication is formulated to provide additional benefits such as: exceptional lubrication, less varnish and combustion chamber deposits, better spark plug life, good mixability with gasoline even in cold weather, and reduction of pre-ignition.

CAUTION

If Evinrude Outboard Motor Oil should not be available, see Oil Instructions Section 2-4.

USE ONLY THE RECOMMENDED OIL TO GASOLINE MIXTURE, REGARDLESS OF THE CLAIMS MADE FOR SOME LUBRICANTS.



SPURIOUS PARTS

It is recommended that only genuine factory approved replacement parts be used. Replacement parts not manufactured nor approved by Evinrude Motors, should not be used.

Failure resulting from use of parts inferior to those manufactured or approved by Evinrude Motors, will not be covered under warranty.

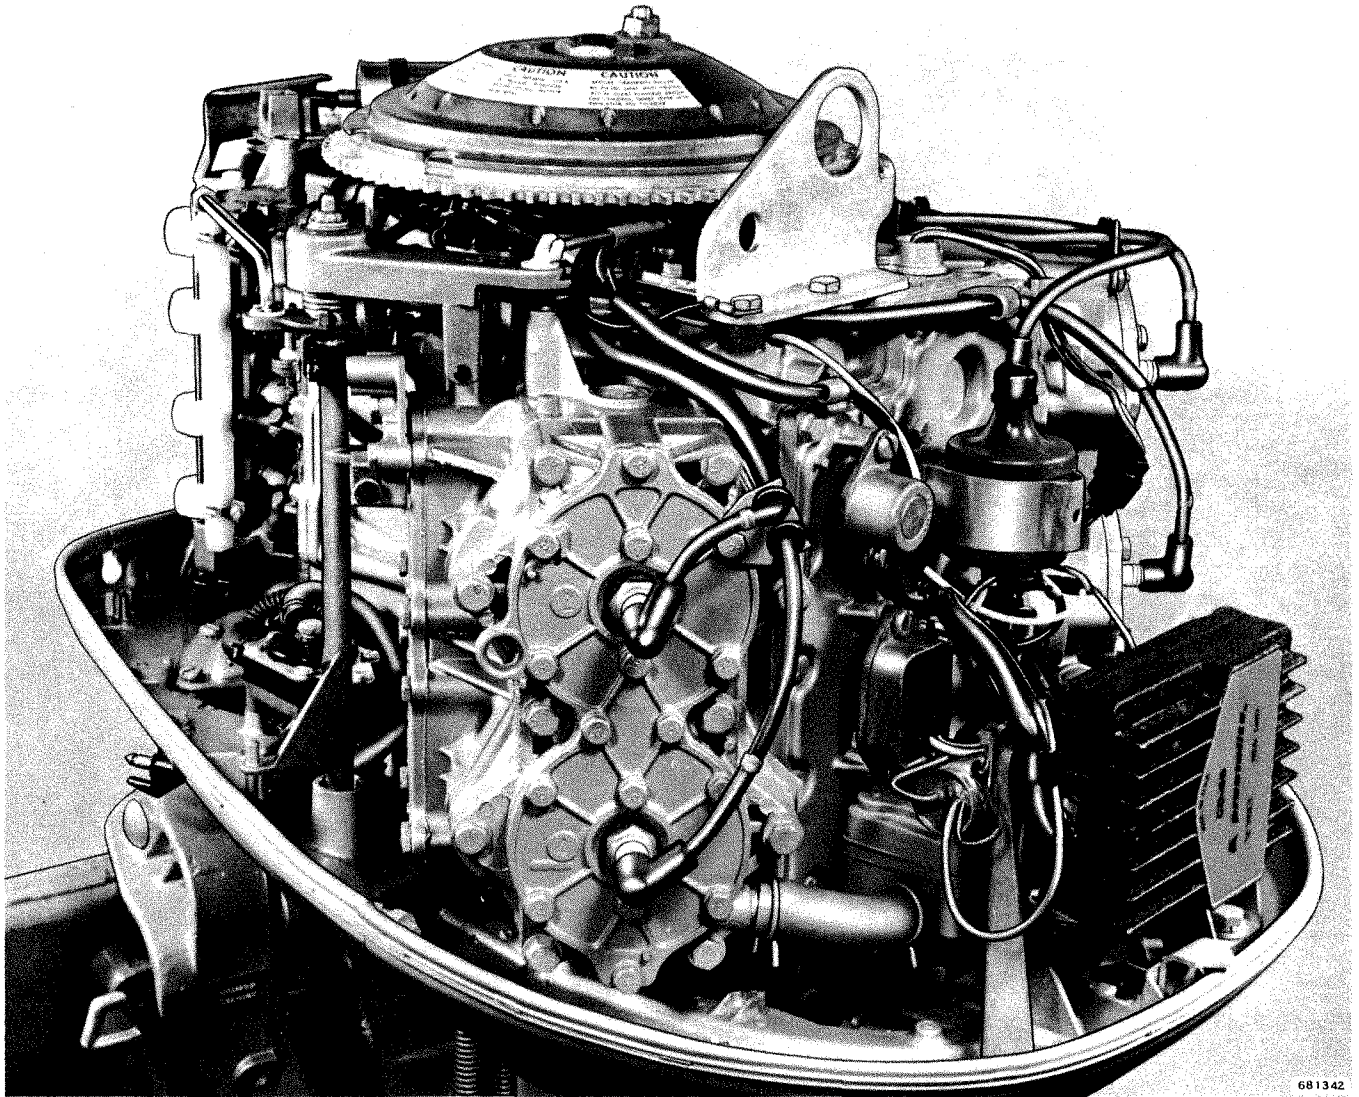


Figure 5-42. Power Head Port Stern View